

GF-22

Foam Testing Fixture

Ideally suited for rubber or other flat specimens that are 25 mm (0.98 in) wide and up to 6 mm (1/4 in) thick. Eccentrically mounted serrated roller grips are self-tightening when the load is applied. A ball socket mounting screw in upper grip helps ensure proper grip alignment.

Capacity


1 kN, 225 lbf

Packaging

Includes upper and lower grip.

Applications

Foam testing.

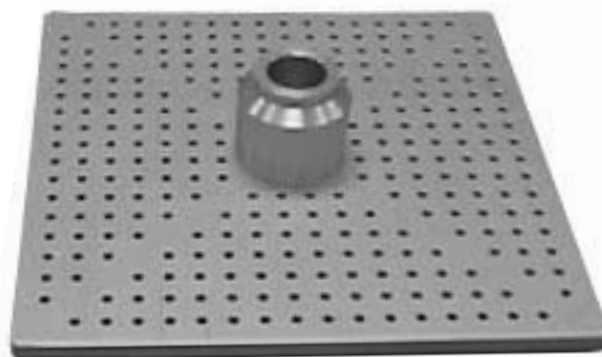

Note: See pages 93-113 for adapters required to fit grips to force gauges, loadcells, and test stands.

Ordering Information

Model	Part No.	Description
GF-22	GF-22	Foam Testing Fixture - 1 kN (225 lbf)